

**2. REAR ARCH PROTECTOR**


Remove rear arch protector.

**B: INSTALLATION**

Installation is in the reverse order of removal.

**CAUTION:**


Only use new screws and clips.

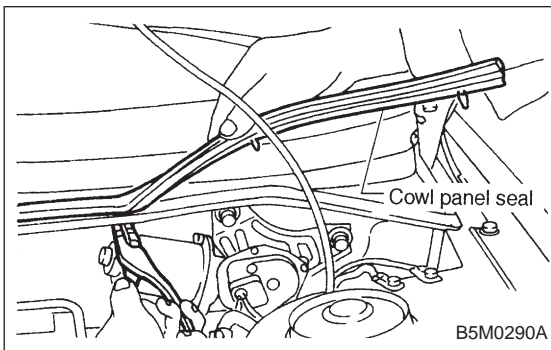

**10. Cowl Panel**

**A: REMOVAL**

- 1) Remove wiper arms.
- 2) Open front hood.
- 3) Remove cowl panel seal using a plier.

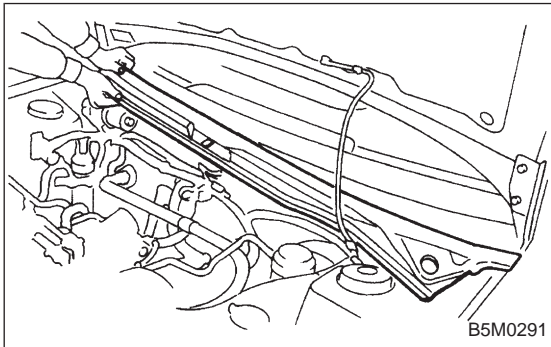

- 4) Lift cowl panel and detach it from clips attached to body panel.

**B: INSTALLATION**

Installation is in the reverse order of removal.

**NOTE:**

When installing cowl panel, first attach a middle clip to the cap attached to body panel. Then tap the cowl panel to attach it to other clips.