


Spark plugs

■ Replacing the spark plugs

⚠ CAUTION

- When disconnecting the spark plug cables, always grasp the spark plug cap, not the cables.
- Make sure the cables are replaced in the correct order.

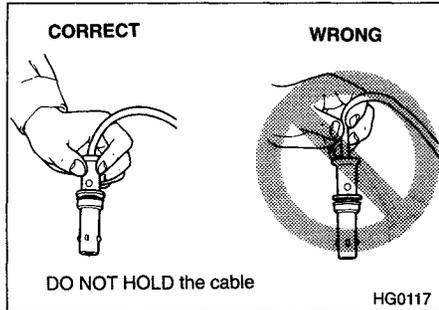

Replace the spark plugs according to the maintenance schedule in the warranty and maintenance booklet.

■ Recommended spark plugs

2.2 Liter models

RC10YC4 (Champion)

[Alternate]

BKR6E-11 (NGK), K20PR-U11 (NIPPON DENSO)

2.5 Liter models

PFR5B-11 (NGK)