


## 1. Tire and Wheel Size

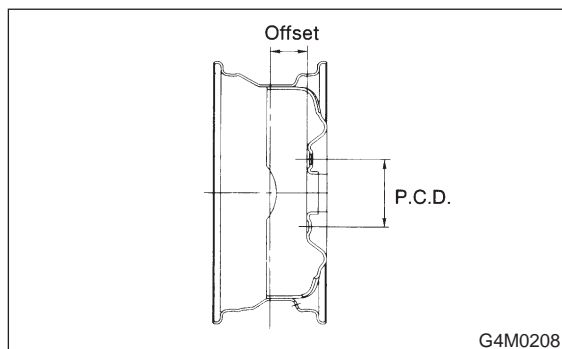

			Tire size	Rim size	Rim offset mm (in)	P.C.D. mm (in)
2200 cc model	Front and Rear	L BRIGHTON POST	P185/70R14 87S	14 × 5 1/2JJ	55 (2.17)	100 (3.94) dia.
		LS	P195/60R15 87H	15 × 6JJ	55 (2.17)	
	T-type tire	FWD	T125/70D15	15 × 4T	53 (2.09)	
		AWD	T135/70D16	16 × 4T	50 (1.97)	
2500 cc model	Front and Rear	GT	P205/55R16 89H	16 × 6 1/2JJ	55 (2.17)	
		OUTBACK SUS	P205/70R15 95S	15 × 6JJ	55 (2.17)	
	T-type tire	GT	T135/70D16	16 × 4T	50 (1.97)	
		OUTBACK SUS	T135/80R16	16 × 4T	50 (1.97)	

NOTE: "T-type" tire for temporary use is supplied as a spare tire.

## 2. Tire Inflation Pressure

	Tire size	Tire inflation pressure kPa (kg/cm <sup>2</sup> , psi)		
		Light load	Full load	Trailer towing
Except OUTBACK and SUS model	P185/70R14 87S P195/60R15 87H P205/55R16 89H	Ft: 220 (2.2, 32) Rr: 210 (2.1, 30)		—
	T125/70D15 T135/70D16	420 (4.2, 60)		—
OUTBACK and SUS model	P205/70R15 95S	Ft: 200 (2.0, 29) Rr: 190 (1.9, 28)		Ft: 200 (2.0, 29) Rr: 220 (2.2, 32)
	T135/80R16	420 (4.2, 60)		—