


## 6. Rear Gate Glass

### A: REMOVAL

- 1) Remove rear wiper motor. <Ref. to 6-2 [W6B3].>
- 2) Disconnect connector from rear defogger terminal.
- 3) Remove glass in the same manner as in windshield.


**NOTE:**

A matching pin is cemented to corners of glass on compartment side. Use a piano wire when cutting each pin.

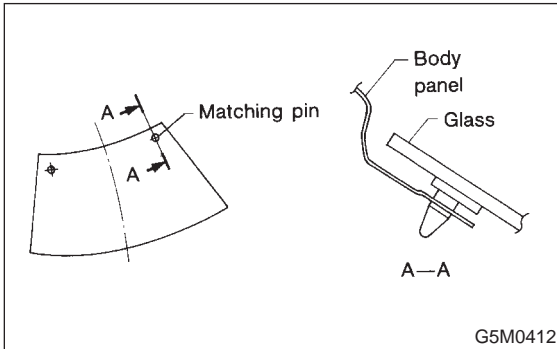


### B: INSTALLATION

- 1) Install a new rubber strip by aligning it with the end of the gate glass.

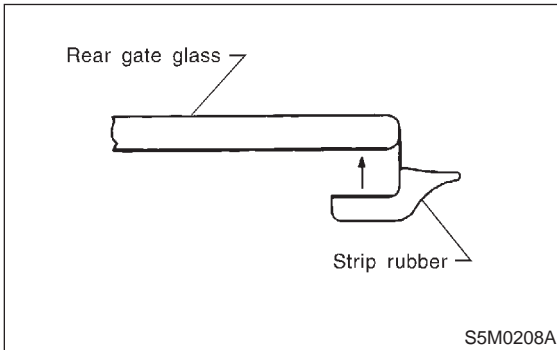


- 2) Fit fastener (A) in window frame flange at locator position.

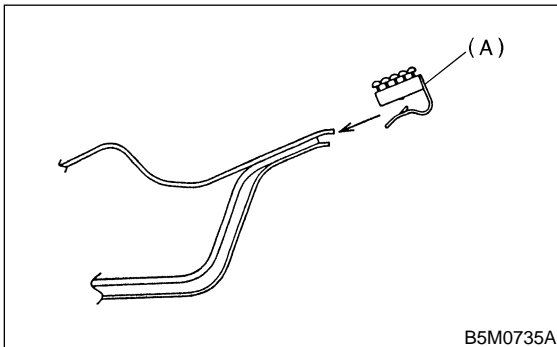

- 3) Install glass in same manner as windshield.

**NOTE:**

After setting locator and fastener in position, lightly press the perimeters so locator and fastener are in close contact with mating part surface.

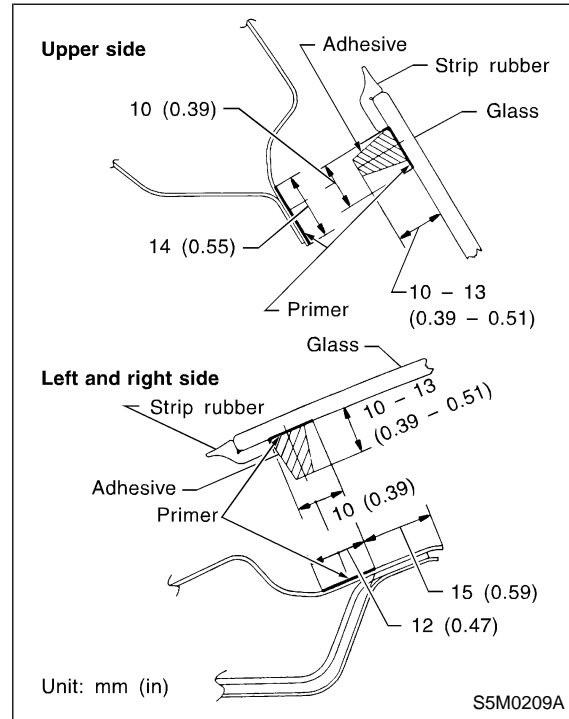

- 4) About one hour after installation, test for water leakage. Leave vehicle for 24 hours before using it.
- 5) Connect rear defogger connections.
- 6) Install rear gate trim and rear wiper.