

## 8. Rear Window Glass


### A: REMOVAL

- 1) Disconnect connector from rear defogger terminal.
- 2) Remove glass in the same manner as in windshield. <Ref. to 5-2 [W5A0].>

**NOTE:**

A matching pin is cemented to the corners of glass on compartment side. Use a piano wire when cutting each pin.

- 2) Install glass in the same manner as in windshield. <Ref. to 5-2 [W5B0].>
- 3) Make rear defogger connections.
- 4) After installation, test for water leakage after about one hour, and leave vehicle alone for 24 hours.

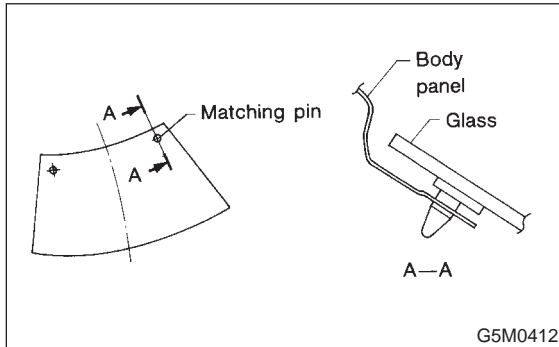

### B: INSTALLATION

- 1) Stick dam rubber and matching pin.

