


5) Remove high-pressure hose (B):

CAUTION:

Plug the opening to prevent foreign matter from getting in.

Remove hose attaching bolt (D).

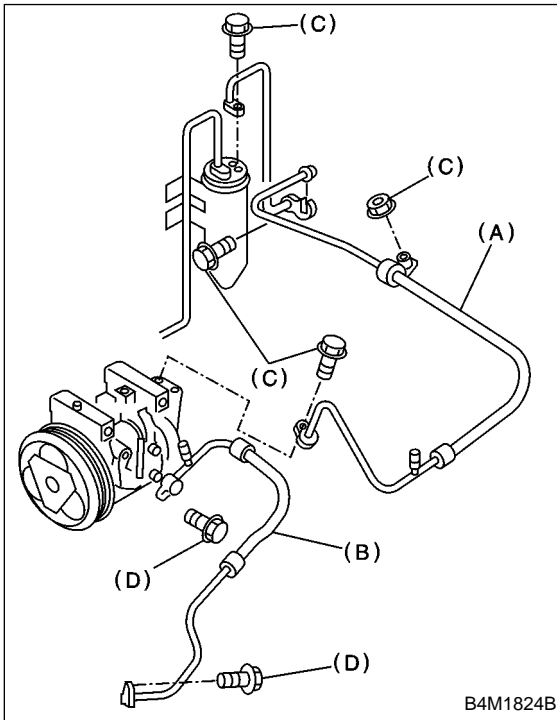

B4M1824B

6) Installation is in the reverse order of removal.


7) Charge refrigerant. <Ref. to 4-7 [W700].>

17. Relay and Fuse

A: LOCATION

Relays used with A/C system are located as shown in figure.

- A/C relay (A)
- Sub fan (condenser fan) relay (B)
- A/C fuse 15 A (C) and sub fan fuse 20 A (D)

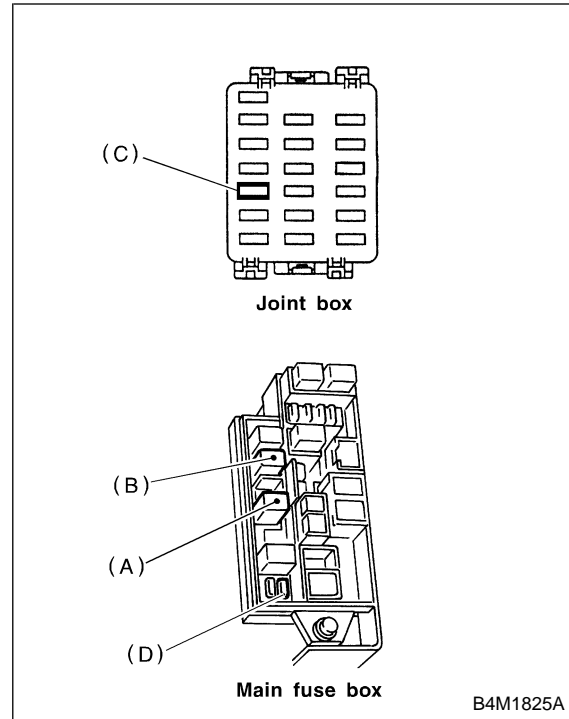

B4M1825A