


1. Tire and Wheel Size

1. Tire and Wheel Size

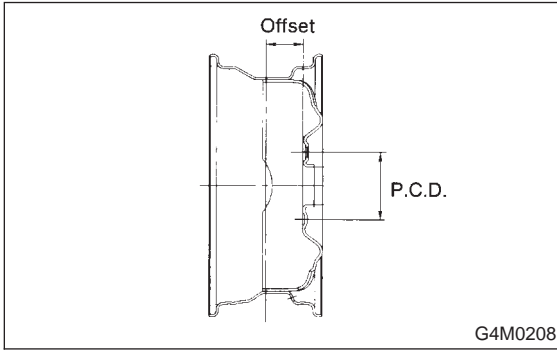

		Tire size	Rim size	Rim offset	P.C.D.
Except OUTBACK	Front and Rear	P195/60R15 87H	15 × 6JJ	55 mm (2.17 in)	100 mm (3.94 in) dia.
		P205/60R15 90H	15 × 6JJ	55 mm (2.17 in)	
		P205/55R16 89H	16 × 6 1/2JJ	55 mm (2.17 in)	
T-type tire	T135/70D16	16 × 4T	50 mm (1.97 in)		
OUTBACK	Front and Rear	P225/60R16 97H	16 × 6 1/2JJ	48 mm (1.89 in)	
	T-type tire	T145/80R16	16 × 4T	50 mm (1.97 in)	

NOTE: "T-type" tire for temporary use is supplied as a spare tire.

2. Tire Inflation Pressure

		Tire size	Tire inflation pressure kPa (kg/cm ² , psi)		
			Light load	Full load	Trailer towing
Except OUTBACK	Front and Rear	P195/60R15 87H	Ft: 230 (2.3, 33), Rr: 220 (2.2, 32)		—
		P205/60R15 90H	Ft: 220 (2.2, 32), Rr: 210 (2.1, 30)		
		P205/55R16 89H			
T-type tire	T135/70D16	420 (4.2, 60)		—	
OUTBACK model	Front and Rear	225/60R16 97H	Ft: 210 (2.1, 30) Rr: 200 (2.0, 29)	Ft: 220 (2.2, 32) Rr: 250 (2.5, 36)	Ft: 200 (2.0, 2.9) Rr: 220 (2.2, 32)
	T-type tire	T145/80R16	420 (4.2, 60)		—