
MECHANISM AND FUNCTION

4. Rear Wiper and Washer

A: DESCRIPTION

1. REAR WIPER

1) The rear wiper has 168 degree wide wiping area.

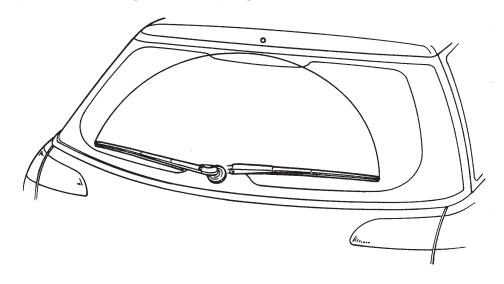

B6H1165

2) The wiper blade is attached to the arm by means of U-hook joint in the same way as the front wiper blade.

2. REAR WASHER SYSTEM

- 1) The washer tank of the rear washer system is shared with the front washer system.
- 2) The washer motor is installed at the bottom of the washer tank, adjacent to the front washer motor.
- 3) The washer nozzle is installed on the upper portion of rear gate panel, and nozzle has two injection ports.
- 4) The check valve is installed just below the washer nozzle.

3. SPECIFICATION

Wiper Motor	Standard voltage	12 V
	No-load current	2 A or less
	Speed [at 0.5 N·m (5 kg-cm, 4.3 in-lb)]	30 ± 5 rpm or more
	Locked rotor current	13 A or less
Wiper Blade	Blade length	375 mm (14.76 in)