


## 2-3 [M500]

### 5. Valve Rocker Assembly

## MECHANISM AND FUNCTION

### 5. Valve Rocker Assembly

- The intake valve rocker arms and the exhaust valve rocker arms are installed on the respective rocker shafts which are retained by the camshaft caps.
- The valve side of the rocker arm is provided with a value rocker adjust screw & nut. Turning of this screw can adjust valve clearance.
- The exhaust valve rocker arms have a "Y"- letter design, and each arm operates two exhaust valves.
- The rocker shaft has an oil passage in it.

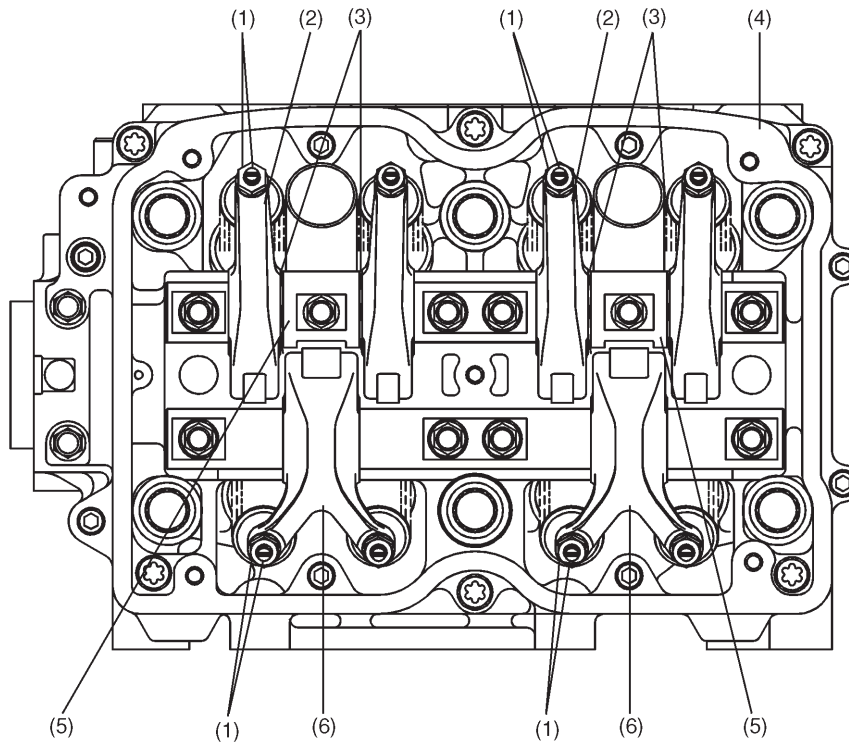

B2H1986A

- |                                     |                              |
|-------------------------------------|------------------------------|
| (1) Valve rocker adjust screw & nut | (4) Camshaft cap             |
| (2) Intake valve rocker arm         | (5) Supporter                |
| (3) Wave washer                     | (6) Exhaust valve rocker arm |