



## 30.Rear Shelf Trim

### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the rear quarter trim. <Ref. to EI-62, SEDAN MODEL, REMOVAL, Rear Quarter Trim.>
- 3) Remove the high-mounted stop light. <Ref. to LI-28, REMOVAL, High-mounted Stop Light.>
- 4) Remove the rear seat cushion. <Ref. to SE-19, WAGON MODEL, REMOVAL, Rear Seat.>
- 5) Remove the lower anchor bolt of rear center seat belt.

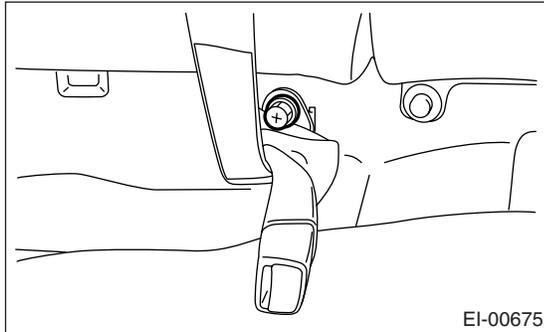

- 6) After disconnecting the high-mounted stop light harness connector (A) and removing the five clips, remove the rear shelf trim with pulling it forward.

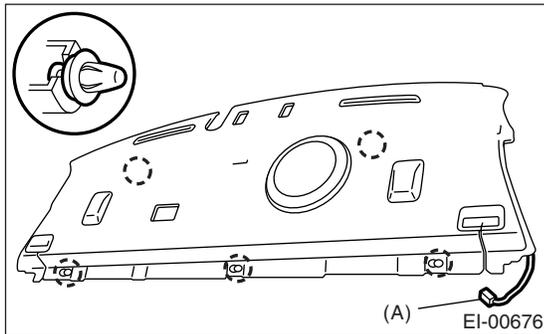


### B: INSTALLATION

Install in the reverse order of removal.

#### NOTE:

Securely insert the vehicle body panel into the hook of rear shelf trim center, and then install the rear shelf trim.

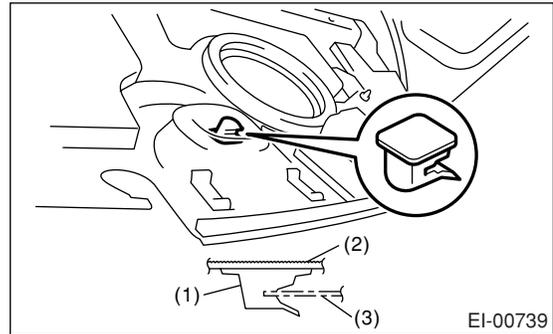

- (1) Hook
- (2) Rear shelf trim
- (3) Vehicle body panel