


## 11.Noise Suppressor

### A: REMOVAL


#### 1. SEDAN MODEL

- 1) Disconnect the ground cable from battery.
- 2) Remove the rear quarter trim. <Ref. to EI-62, SEDAN MODEL, REMOVAL, Rear Quarter Trim.>
- 3) Remove the curtain airbag module. <Ref. to AB-20, REMOVAL, Curtain Airbag Module.>
- 4) Disconnect the harness connector from noise suppressor.
- 5) Remove the harness clip.
- 6) Remove the screw and detach noise suppressor.

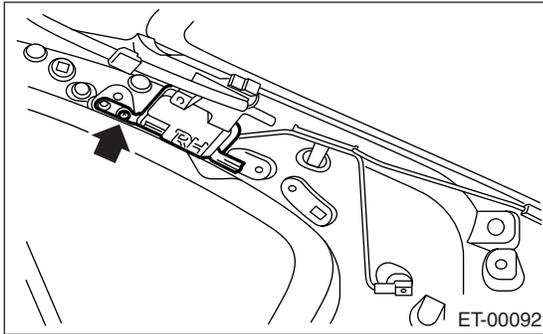

#### 2. WAGON MODEL

- 1) Disconnect the ground cable from battery.
- 2) Remove the rear gate trim. <Ref. to EI-68, REMOVAL, Rear Gate Trim.>
- 3) Disconnect the harness connector from noise suppressor.
- 4) Remove the screws and detach noise suppressor.

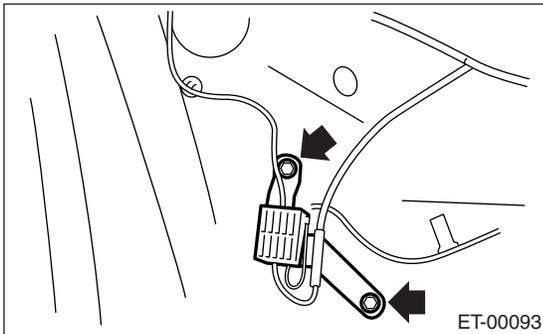

### B: INSTALLATION

Install in the reverse order of removal.