


## 15.Rear Quarter Protector

### A: REMOVAL

- 1) Remove the side sill spoilers. <Ref. to EI-41, REMOVAL, Side Sill Spoiler.>
- 2) Remove the clips (A) with rotating it rearward using the fender arch as a fulcrum, and then remove the rear quarter protector.

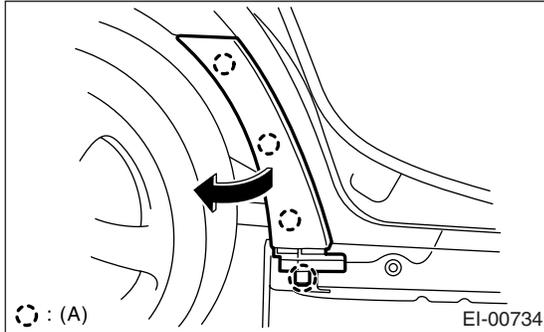

### B: INSTALLATION

Install in the reverse order of removal.