


## 4. Audio


### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the console box. <Ref. to EI-53, REMOVAL, Console Box.>
- 3) Remove the console front panel. <Ref. to EI-54, REMOVAL, Center Console.>
- 4) Remove the console side garnish. <Ref. to EI-54, REMOVAL, Center Console.>

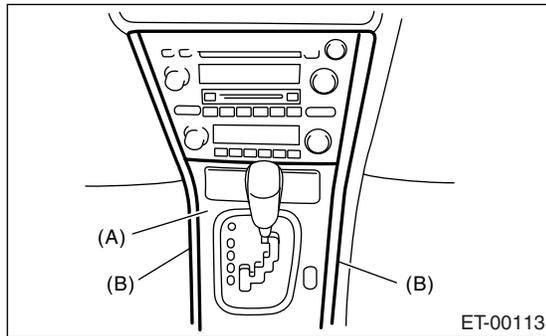

- (A) Console front panel
- (B) Console side garnish

- 5) Remove the screws, and slightly pull the audio out from center console.

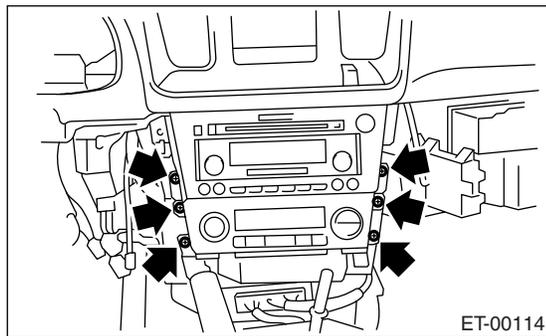

- 6) Disconnect the harness connector and antenna feeder cord, and then remove the audio.

### B: INSTALLATION

Install in the reverse order of removal.