


12. Control Panel (Auto A/C Model)

A: REMOVAL


- 1) Remove the audio assembly. <Ref. to ET-5, REMOVAL, Audio.>
- 2) Remove the six screws.

NOTE:

When working the removed audio assembly with its back facing down, place wooden blocks between the audio assembly and the workbench to prevent ground terminal from folding.

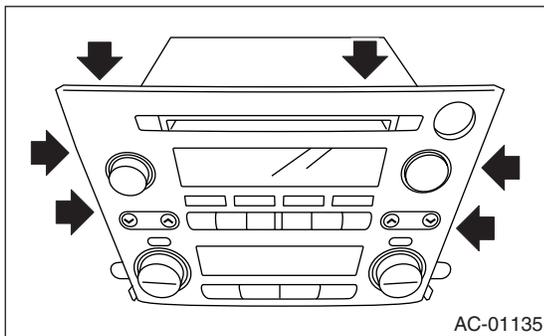

- 3) Using a fine flat tip screwdriver, remove the ten hooks gradually in the order of both sides, lower and upper side.

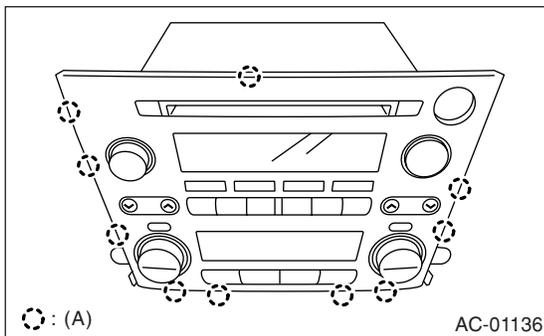

(A) Hook

- 4) Pull the panel straight toward you to remove.

CAUTION:

Be careful not to touch the logic board to prevent static electricity damage.

B: INSTALLATION

- 1) Fit the hooks. Make sure the firm connection between logic board and connector by pushing the center part of panel with fingertips.
- 2) Install in the reverse order of removal.