


7. Scalp Cap


A: REPLACEMENT

1. MODEL WITH SIDE TURN SIGNAL LIGHT


- 1) Remove the mirror. <Ref. to GW-21, REPLACEMENT, Outer Mirror.>
- 2) Press-in the upper side clips (A) from inside of door mirror.

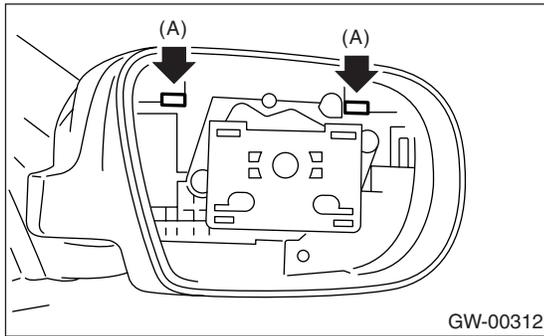

- 3) Pull the scalp cap forward of door mirror, remove the upper side clips (A) and lower side hooks (B), and then remove the scalp cap.

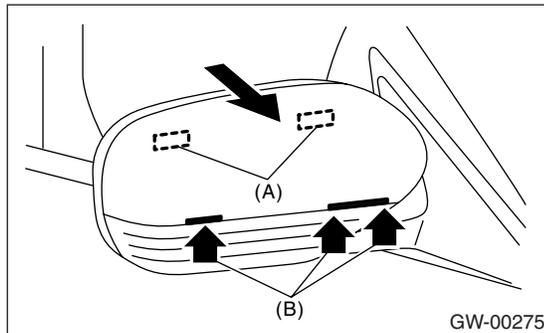

- 4) Insert the lower hooks (B) of scalp cap to door mirror and push the upper clips (A) in.

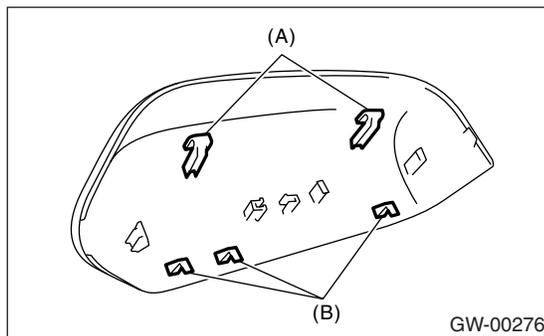


- 5) Install the scalp cap securely.

CAUTION:

Do not remove the scalp cap forcibly. The lower hooks may be damaged.


2. MODEL WITHOUT SIDE TURN SIGNAL LIGHT

- 1) Remove the mirror. <Ref. to GW-21, REPLACEMENT, Outer Mirror.>
- 2) Press-in the clips (A) from inside of door mirror.

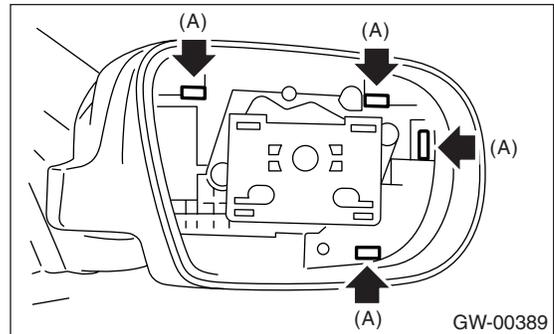

- 3) Pull the scalp cap forward of door mirror, and then remove the scalp cap.

- 4) Mate the backside clip (A) of scalp cap with the clip hole of the outer mirror to install, and then push the scalp cap in.

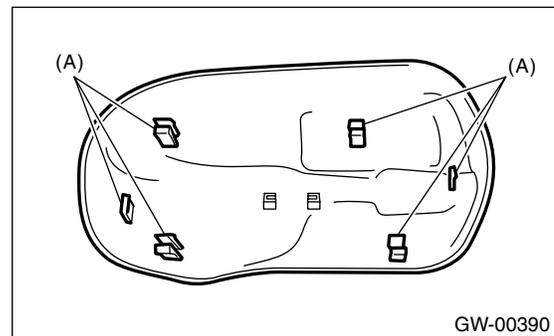

- 5) Install the scalp cap securely.