



## 20. Console Box

### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the parking brake lever cover.

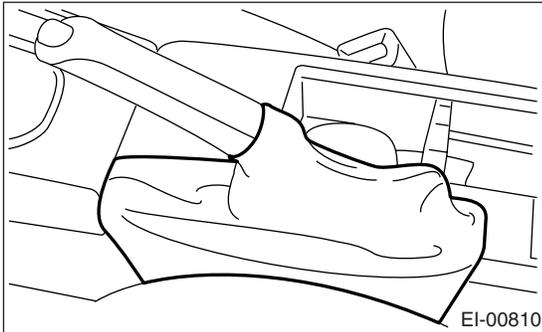

- 3) Remove the bolts and clips.

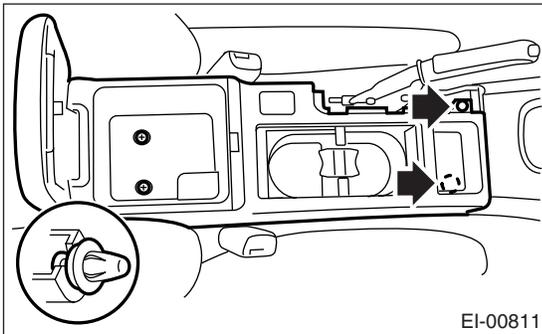

- 4) Disconnect the connector, and remove the console box.

### B: INSTALLATION

Install in the reverse order of removal.