

Front Wiper Arm

WIPER AND WASHER SYSTEMS


6. Front Wiper Arm

A: REMOVAL

CAUTION:


When replacing wiper blades or etc., be sure to stand up the driver side wiper arm first, then passenger side wiper arm next. Also, when putting the wiper arms back, be sure to start with passenger side first, then driver side next. Doing this in the reverse order may result in damage of passenger side wiper arm by hitting with driver side wiper blade.

- 1) Open the hood.
- 2) Remove the cap.
- 3) Remove the nut to remove wiper arm.

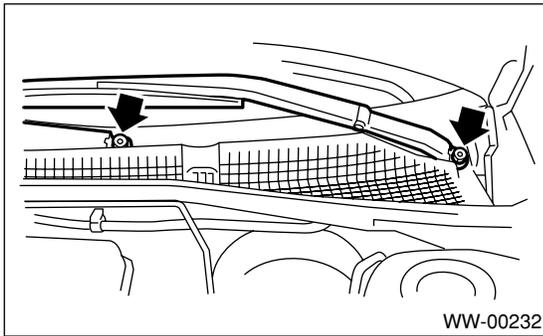

B: INSTALLATION

- 1) Install in the reverse order of removal.
- 2) Operate the wiper once.
- 3) Align the wiper blade to ceramic print point mark (A) of front window panel.

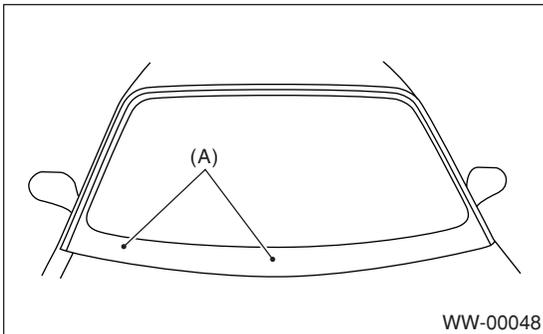

Tightening torque:

Refer to "COMPONENT" of "General Description".

<Ref. to WW-2, FRONT WIPER, COMPONENT, General Description.>

C: ADJUSTMENT

Operate the wiper once. Align the wiper blade to ceramic print point mark (A) of front window panel.

