

## 4. Wiper Blade


### A: REMOVAL

**CAUTION:**

When replacing wiper blades or etc., be sure to stand up the driver side wiper arm first, then passenger side wiper arm next. Also, when putting the wiper arms back, be sure to start with passenger side first, then driver side next. Doing this in the reverse order may result in damage of passenger side wiper arm by hitting with driver side wiper blade.


#### 1. FRONT

While pushing the locking clip (A) up, pull out the blade from arm to the arrow direction.

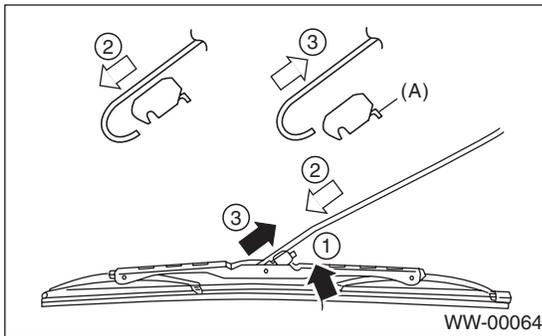

#### 2. REAR

Turn the blade in the direction of arrow (A) and remove it from arm.

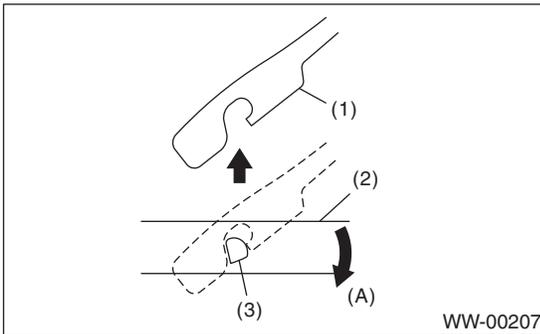

- (A) Turn the wiper blade.
- (1) Wiper arm
- (2) Wiper blade
- (3) Installing part of wiper blade


### B: INSTALLATION

- 1) Install in the reverse order of removal.
- 2) Confirm that the clip is locked securely.

### C: DISASSEMBLY


#### 1. METAL TYPE

Pull side (A) of the wiper rubber stopper and remove the rubber from blade assembly.

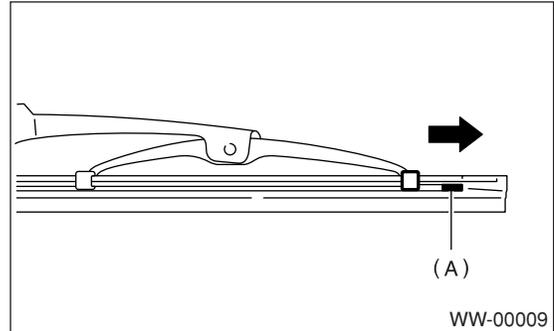

#### 2. RESIN TYPE


Pull the wiper rubber top slightly from the stopper (A) and pull out fully.

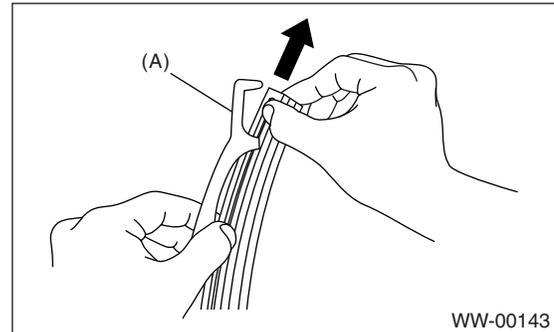


### D: ASSEMBLY

#### 1. METAL TYPE


1) Insert the wiper rubber onto blade so that the stopper is in the position shown in the figure.

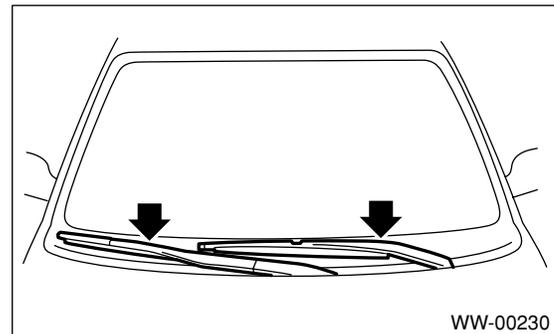


2) Make sure the wiper rubber is securely fastened to the pull stopper (A).

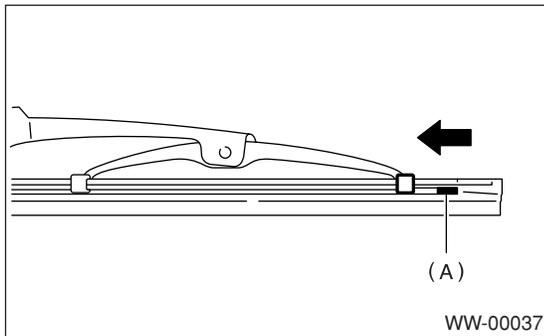


### 2. RESIN TYPE

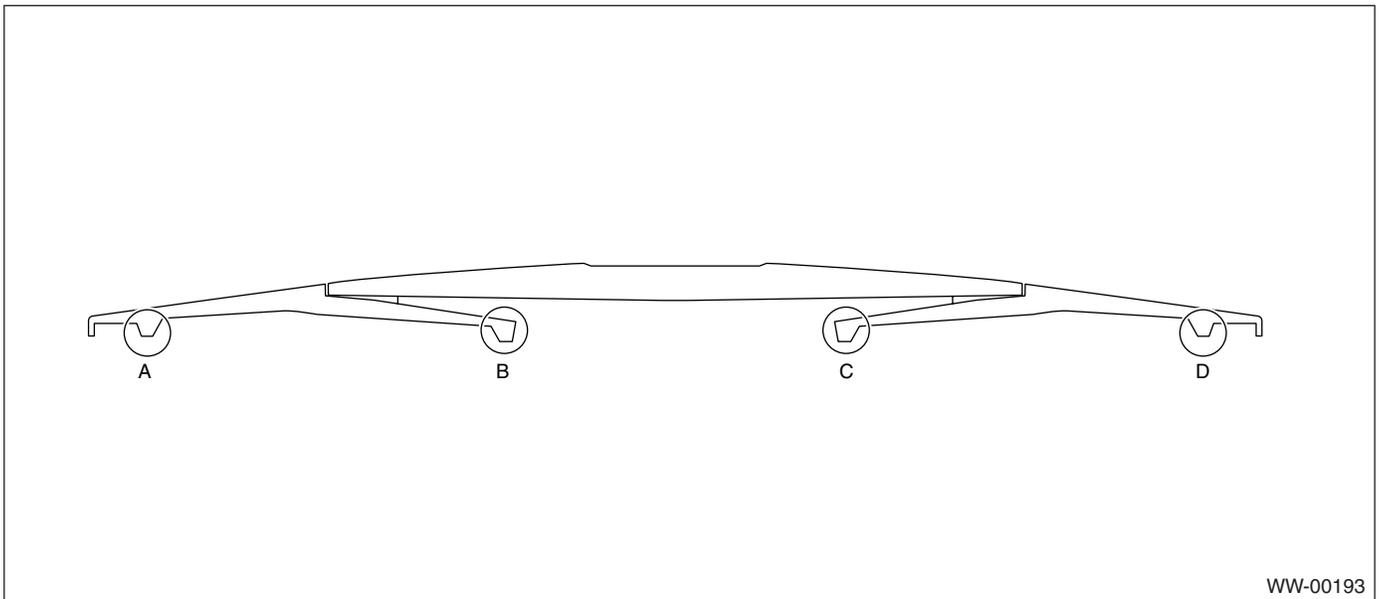


1) Insert the wiper rubber through the claw B.

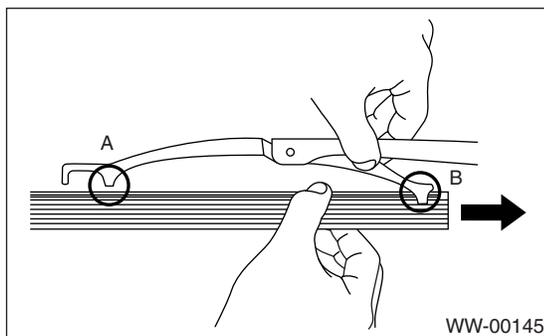

2) Insert the wiper rubber until its top end protrudes approx. 20 mm (0.79 in) from stopper D.

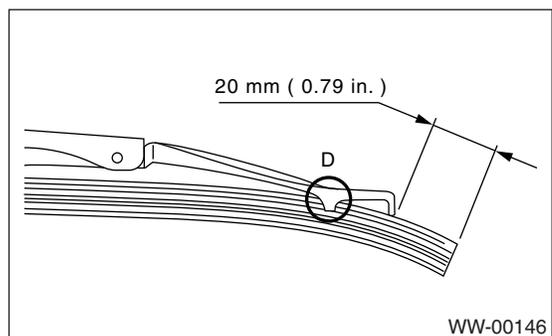

3) Insert the wiper rubber into the claw A.

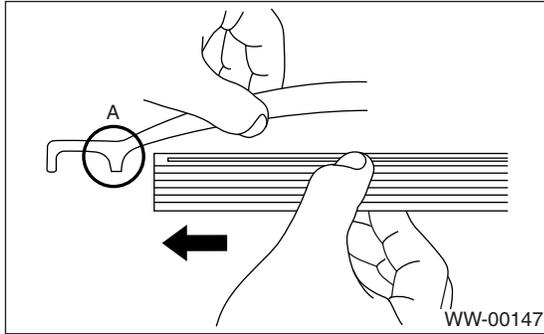

### **E: INSPECTION**

1) When the wiper does not perform well, inspect the followings:

- Make sure the movable part of the wiper blade assembly moves smoothly.
- Make sure the wiper rubber is not deformed or damaged.

2) If damaged, replace with new one.