
37.Ornament

A: INSTALLATION

1. LETTER MARK

Adhere the letter mark with following dimension.

· Sedan model

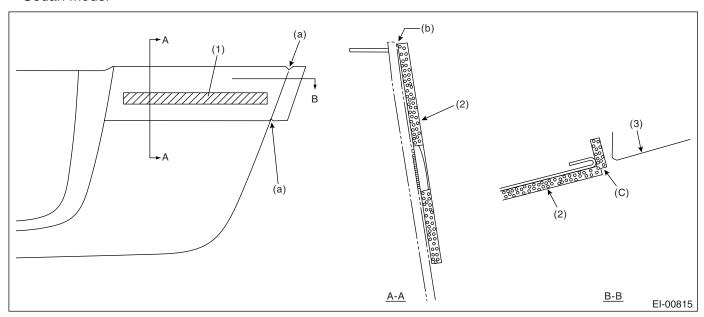


- (a) Apply the apply tape with aligning the cut out to the end of trunk lid garnish.
- (1) Letter mark

- (b) Apply the apply tape with aligning R stop on the top end of trunk lid garnish.
- (2) Apply tape

- (c) Align the slit of apply tape to panel end.
- (3) Rear combination light

Wagon model

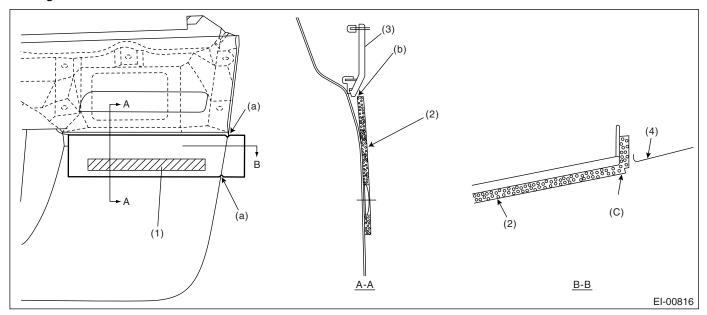


- (a) Apply the apply tape with aligning the cut out to the end of rear gate panel.
- (1) Letter mark
- (2) Apply tape

- (b) Apply the apply tape with aligning outer bottom end of rear gate garnish.
- (3) Rear gate garnish
- (c) Align the slit of apply tape to panel end.
- (4) Rear combination light

2. AWD STICKER


Apply the AWD sticker from inside of glass with following dimension.

Sedan model

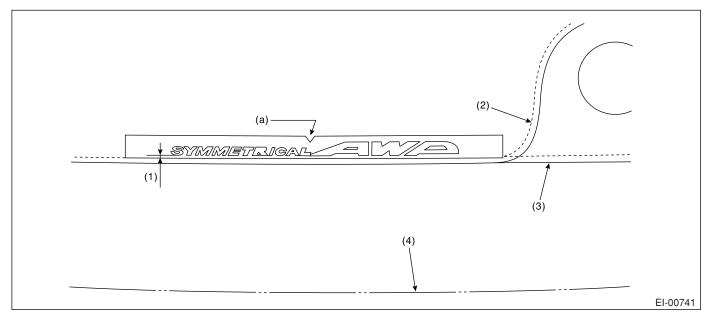


- (a) Apply the apply tape with aligning the cut out to the end of rear glass center.
- (1) 1 mm (0.04 in)
- (2) Gradation end of ceramic print (with rear wiper)
- (3) Gradation end of ceramic print (without rear wiper)
- (4) End of rear glass

Wagon model (RH side)

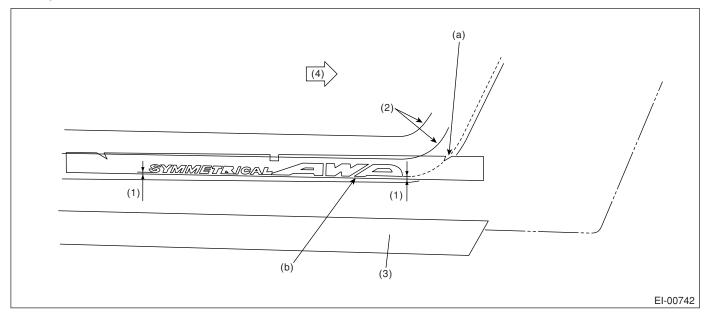

• Wagon model (LH side)

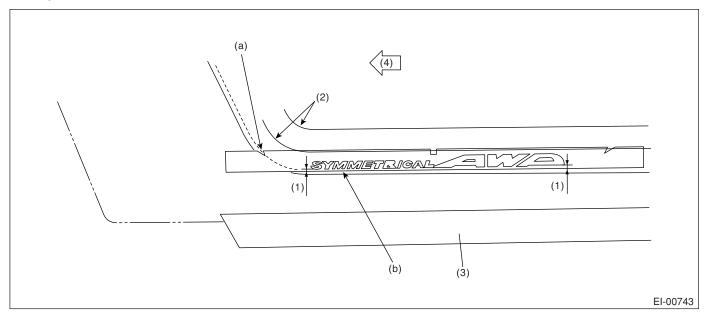

- (a) Apply the apply tape with aligning the cut out to the ceramic print.
- (1) 1 mm (0.04 in)
- (2) Glass antenna wire
- (b) Gradation end of ceramic print
- (3) Molding

(4) Front side of vehicle