
1. General Description

A: SPECIFICATION

Front wiper motor	Input	12 V — 72 W or less
Rear wiper motor	Input	12 V — 42 W or less
Front washer motor	Pump type	Centrifugal
	Input	12 V — 36 W or less
Rear washer motor	Pump type	Centrifugal
	Input	12 V — 36 W or less

B: COMPONENT

1. FRONT WIPER

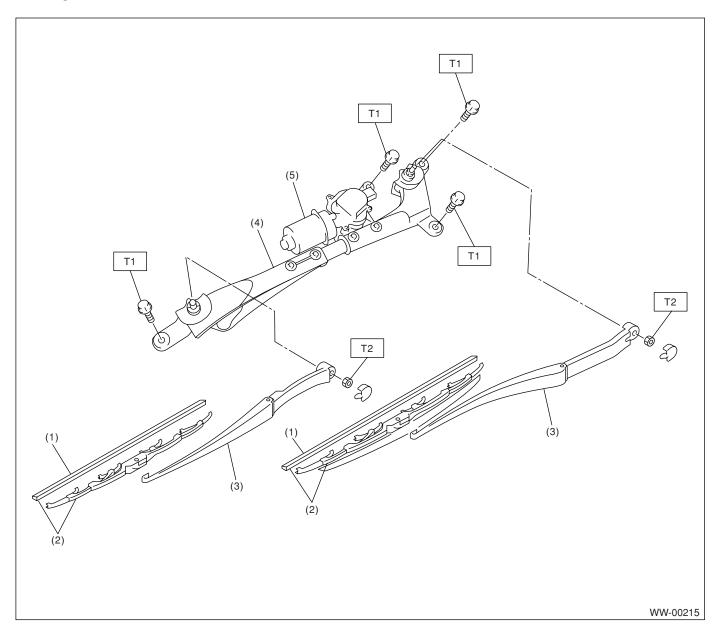

- (1) Wiper rubber
- (2) Wiper blade ASSY
- (3) Wiper arm


- (4) Wiper link ASSY
- (5) Wiper motor ASSY

Tightening torque: N⋅m (kgf-m, ft-lb)

T1: 6.0 (0.61, 4.4)

T2: 20 (2.0, 14.5)

2. REAR WIPER (WAGON MODEL)

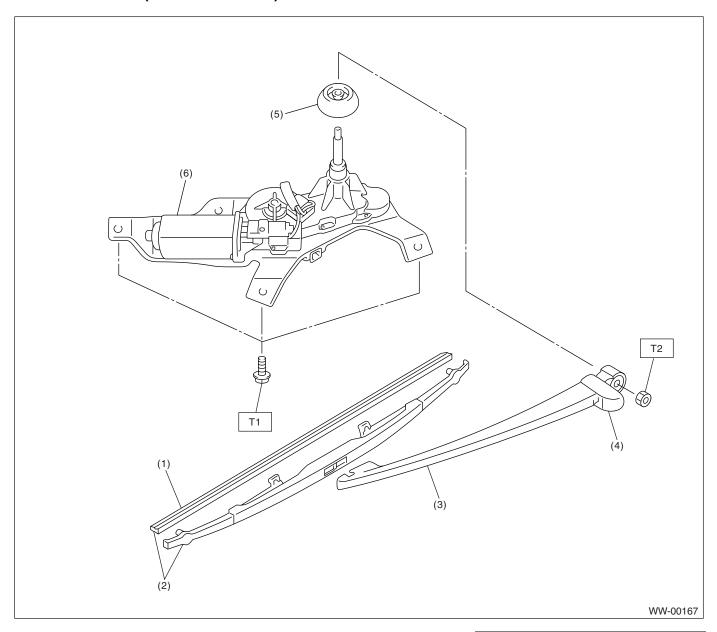

- (1) Wiper rubber
- (2) Wiper blade ASSY
- (3) Wiper arm


- (4) Wiper arm cover
- (5) Cap
- (6) Wiper motor ASSY

Tightening torque: N·m (kgf-m, ft-lb)

T1: 7.5 (0.77, 6.0)

T2: 8.0 (0.82, 5.9)

3. WASHER TANK

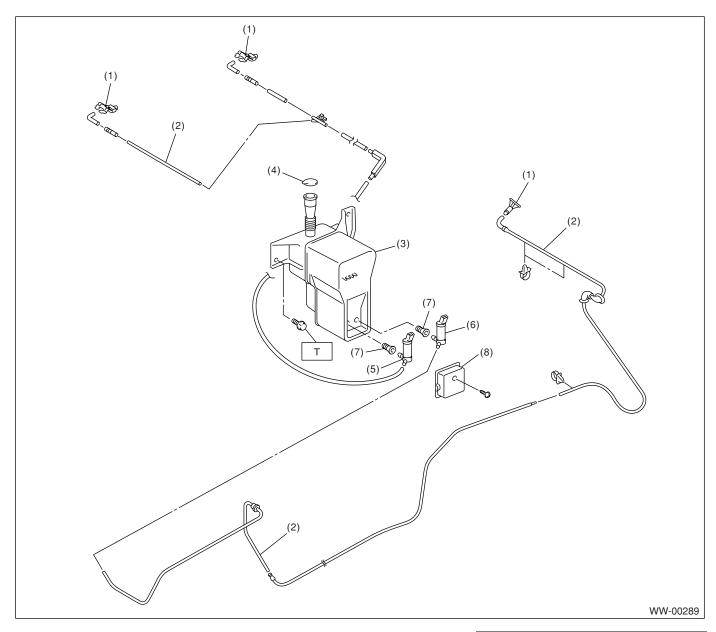

- (1) Washer nozzle
- (2) Washer hose
- (3) Washer tank
- (4) Washer tank cap

- (5) Front washer motor
- (6) Rear washer motor
- (7) Grommet
- (8) Washer motor cover

Tightening torque: N⋅m (kgf-m, ft-lb)
T: 6.0 (0.61, 4.4)

Machar mater cover

C: CAUTION

- Connect the connectors and hoses securely during reassembly.
- After reassembly, make sure functional parts operate smoothly.
- Be careful that wiring harnesses of airbag system pass near electrical parts and switches.
- Wiring harnesses and connectors of all airbag system are yellow color. Do not use a tester equipment on these circuits.
- Care must be taken when connecting the piping hose so that no bending, jamming, etc. are caused.
- Even if a little oil or grease such as silicon oil gets in the tank and washer passages, an oil film is easily formed on the glass, causing the wiper to chatter and judder, therefore, be careful not to let this happen.