
## 1. Air Conditioning System

## 1. LHD MODEL

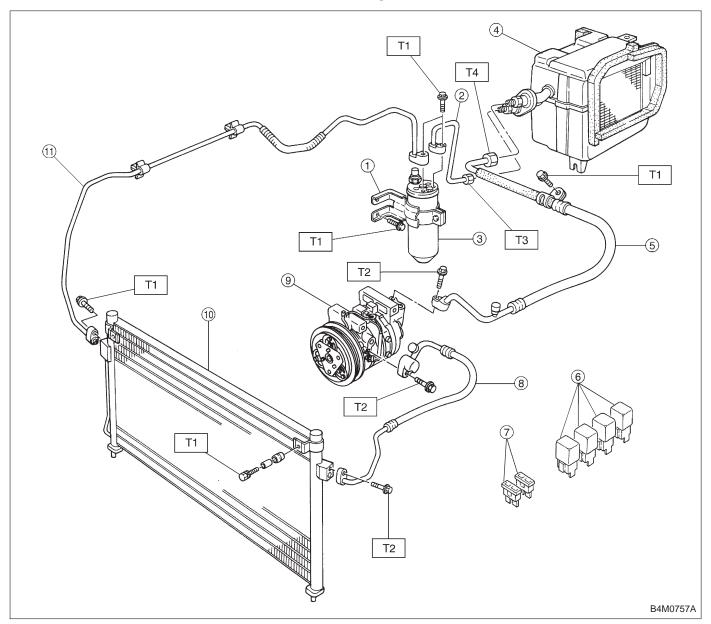


- ① Receiver drier bracket
- Pipe (Receiver drier Evaporator module)
- 3 Receiver drier
- 4 Evaporator unit
- (5) Hose (Low-pressure)
- 6 A/C relay
- 7 Fuse
- Hose (High-pressure)
- 9 Compressor
- ① Condenser
- ① Pipe (Condenser Receiver drier)

Tightening torque: N·m (kg-m, ft-lb)

T1: 7.4±2.0 (0.75±0.2, 5.4±1.4)

T2: 15±5 (1.5±0.5, 10.8±3.6)
T3: 15±3 (1.5±0.3, 10.8±2.2)
T4: 25±5 (2.5±0.5, 18.1±3.6)

## 2. RHD MODEL

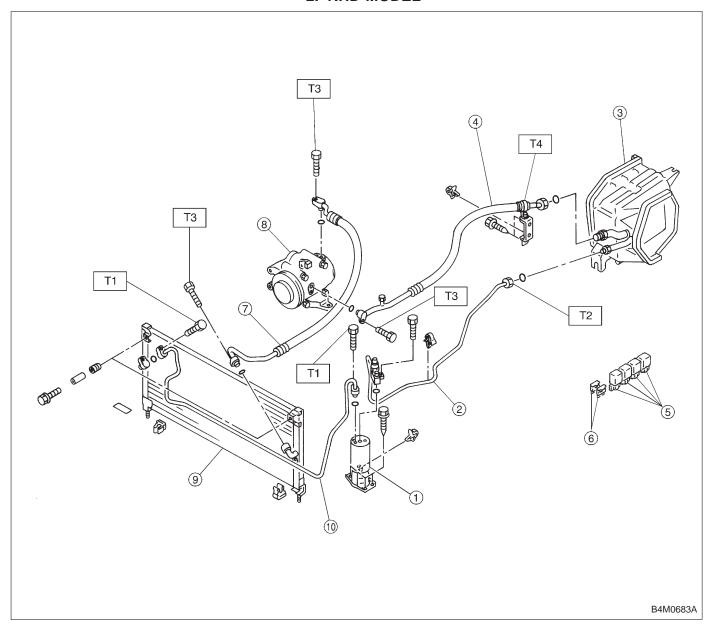

- 1) Receiver drier
- Pipe (Receiver drier Evaporator module)
- 3 Evaporator unit
- 4 Hose (Low-pressure)
- ⑤ A/C relay
- 6 Fuse
- ① Hose (High-pressure)
- 8 Compressor
- 9 Condenser
- Pipe (Condenser Receiver drier)

Tightening torque: N·m (kg-m, ft-lb) T1: 7.4±2.0 (0.75±0.2, 5.4±1.4)

T2: 15±3 (1.5±0.3, 10.8±2.2)
T3: 15±5 (1.5±0.5, 10.8±3.6)
T4: 25±5 (2.5±0.5, 18.1±3.6)