


1. Intake Manifold

A: 2200 cc MODEL

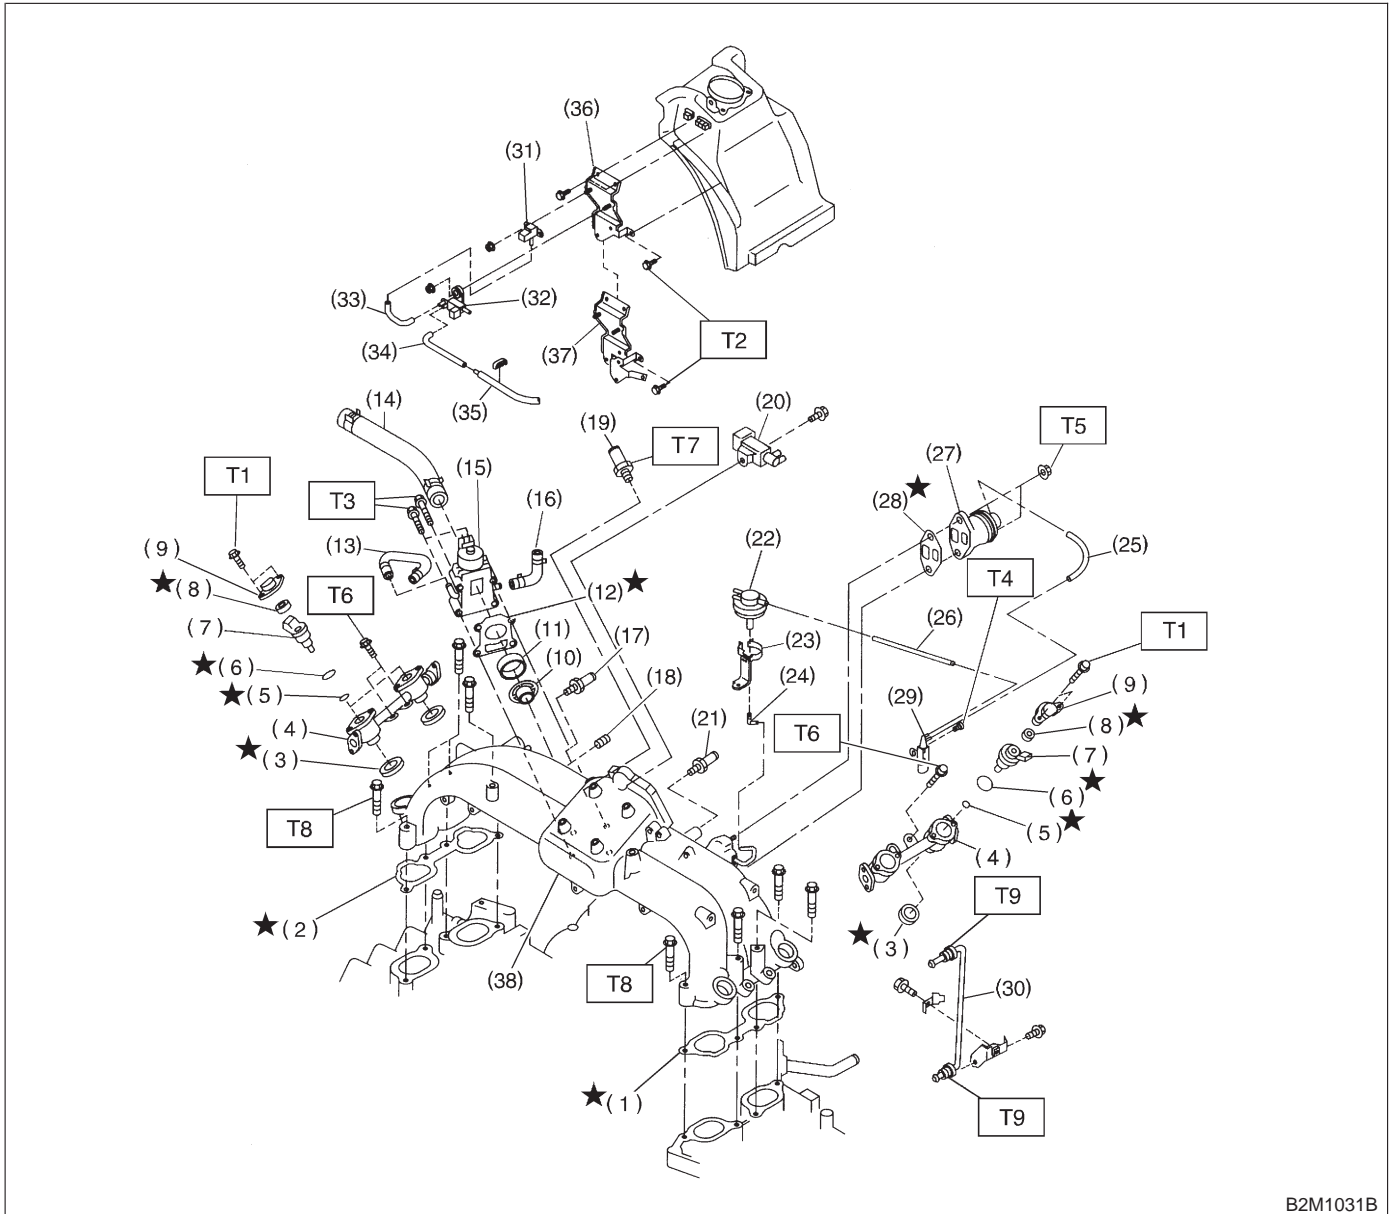

B2M1031B


# COMPONENT PARTS

[C1A0] 2-7  
1. Intake Manifold

- 
- |                                      |  |   |
|--------------------------------------|--|---|
| (1) Intake manifold gasket LH        | (21) Nipple                                    | (35) Vacuum hose C                          |
| (2) Intake manifold gasket RH        | (22) BPT (Except MT vehicles)                  | (36) Bracket (Except Canada spec. vehicles) |
| (3) Fuel injector pipe insulator     | (23) BPT holder bracket (Except MT vehicles)   | (37) Bracket (For Canada spec. vehicles)    |
| (4) Fuel injector pipe               | (24) Back pressure hose (Except MT vehicles)   | (38) Intake manifold                        |
| (5) O-ring A                         | (25) EGR vacuum hose A (Except MT vehicles)    |   |
| (6) O-ring B                         | (26) EGR vacuum hose B (Except MT vehicles)    |   |
| (7) Fuel injector                    | (27) EGR valve (Except MT vehicles)            |   |
| (8) Insulator                        | (28) Gasket (Except MT vehicles)               |   |
| (9) Fuel injector cap                | (29) EGR solenoid valve (Except MT vehicles)   |   |
| (10) Plate                           | (30) EGR pipe (Except MT vehicles)             |   |
| (11) Sealing                         | (31) Pressure sensor                           |   |
| (12) Gasket                          | (32) Pressure sources switching solenoid valve |   |
| (13) Engine coolant hose B           | (33) Vacuum hose A                             |   |
| (14) Air by-pass hose                | (34) Vacuum hose B                             |   |
| (15) Idle air control solenoid valve |  |   |
| (16) Engine coolant hose A           |  |   |
| (17) Nipple (AT vehicles)            |  |   |
| (18) Plug                            |  |   |
| (19) PCV valve                       |  |   |
| (20) Purge control solenoid valve    |  |   |
- 
- Tightening torque: N-m (kg-m, ft-lb)**
- T1: 3.4±0.5 (0.35±0.05, 2.5±0.4)**
- T2: 4.9±0.5 (0.5±0.05, 3.6±0.4)**
- T3: 6.4±0.5 (0.65±0.05, 4.7±0.4)**
- T4: 16±1.5 (1.6±0.15, 11.6±1.1)**
- T5: 19±1.5 (1.9±0.15, 13.7±1.1)**
- T6: 19±2 (1.9±0.2, 13.7±1.4)**
- T7: 23±3 (2.3±0.3, 16.6±2.2)**
- T8: 25±2 (2.5±0.2, 18.1±1.4)**
- T9: 34±2 (3.5±0.2, 25.3±1.4)**
-

## COMPONENT PARTS

### B: 2500 cc MODEL

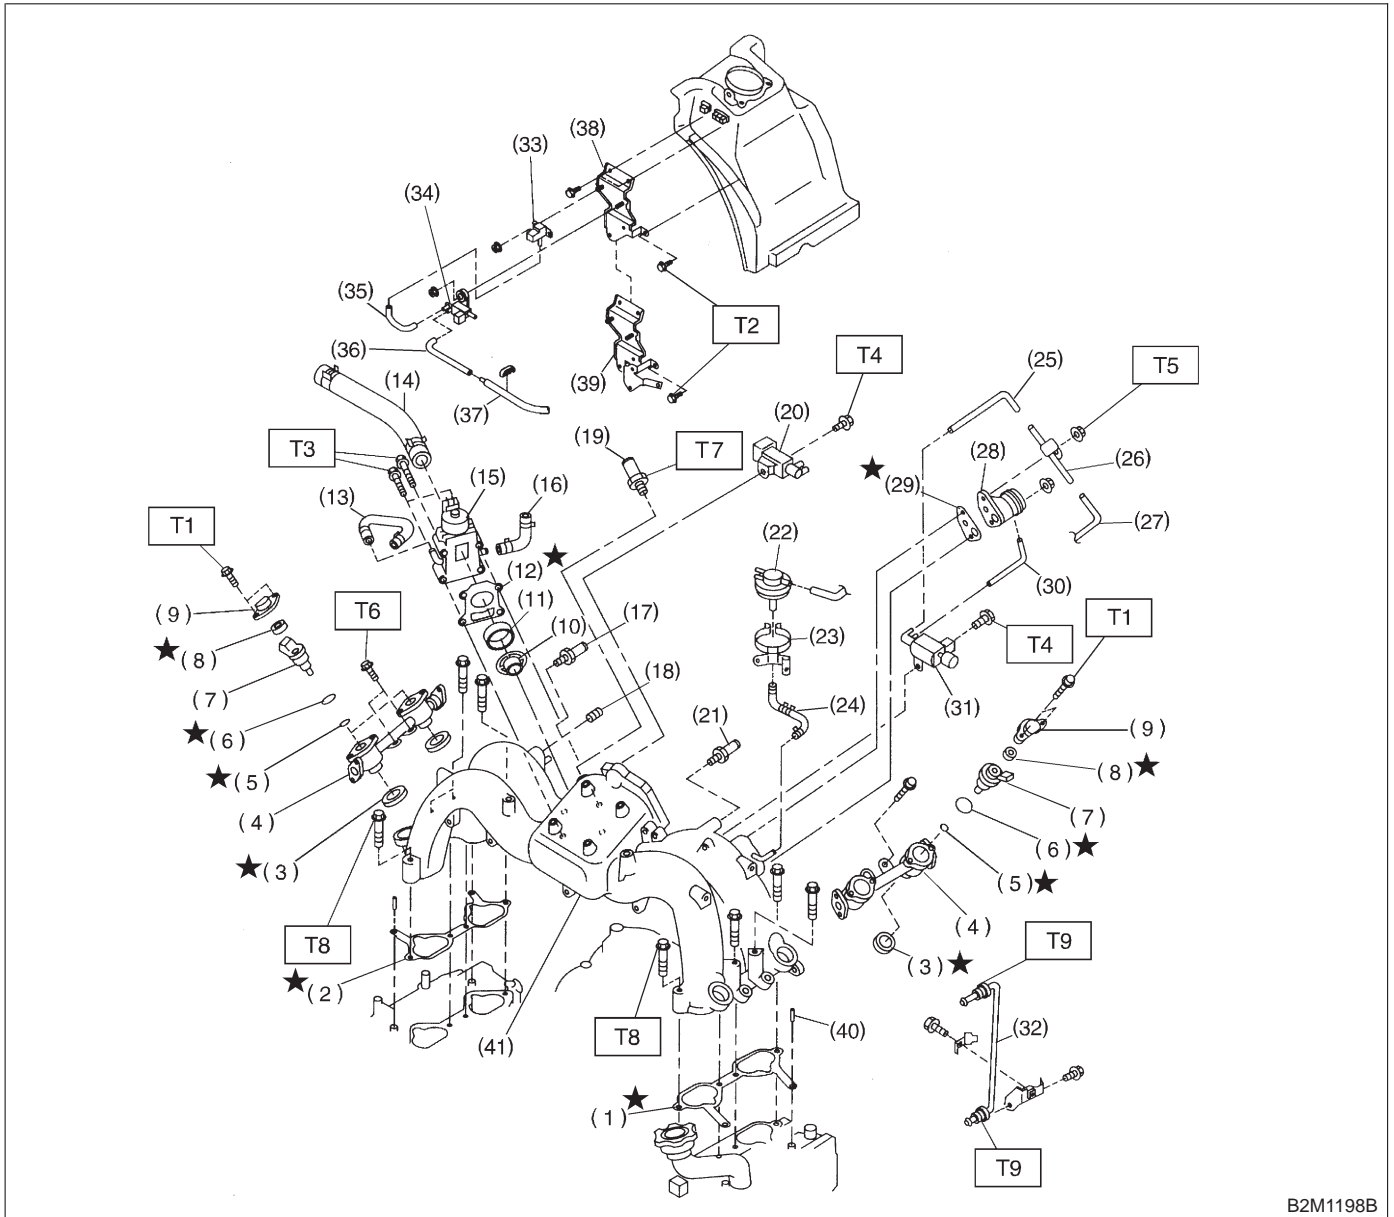

B2M1198B

- |                                      |                                   |  |
|--------------------------------------|-----------------------------------|--|
| (1) Intake manifold gasket LH        | (18) Plug                         | (34) Pressure sources switching solenoid valve |
| (2) Intake manifold gasket RH        | (19) PCV valve                    | (35) Vacuum hose A                             |
| (3) Fuel injector pipe insulator     | (20) Purge control solenoid valve | (36) Vacuum hose B                             |
| (4) Fuel injector pipe               | (21) Nipple                       | (37) Vacuum hose C                             |
| (5) O-ring A                         | (22) BPT                          | (38) Bracket (Except Canada spec. vehicles)    |
| (6) O-ring B                         | (23) BPT holder bracket           | (39) Bracket (For Canada spec. vehicles)       |
| (7) Fuel injector                    | (24) Back pressure hose           | (40) Collar                                    |
| (8) Insulator                        | (25) EGR vacuum hose A            | (41) Intake manifold                           |
| (9) Fuel injector cap                | (26) EGR vacuum pipe              |  |
| (10) Plate                           | (27) EGR vacuum hose C            |  |
| (11) Sealing                         | (28) EGR valve                    |  |
| (12) Gasket                          | (29) Gasket                       |  |
| (13) Engine coolant hose B           | (30) EGR vacuum hose B            |  |
| (14) Air by-pass hose                | (31) EGR solenoid valve           |  |
| (15) Idle air control solenoid valve | (32) EGR pipe                     |  |
| (16) Engine coolant hose A           | (33) Pressure sensor              |  |
| (17) Nipple (AT vehicles)            |                                   |  |

## COMPONENT PARTS

[C1B0] 2-7  
1. Intake Manifold

---

---

*Tightening torque: N·m (kg·m, ft·lb)*

*T1: 3.4±0.5 (0.35±0.05, 2.5±0.4)*

*T2: 4.9±0.5 (0.5±0.05, 3.6±0.4)*

*T3: 6.4±0.5 (0.65±0.05, 4.7±0.4)*

*T4: 16±1.5 (1.6±0.15, 11.6±1.1)*

*T5: 19±1.5 (1.9±0.15, 13.7±1.1)*

*T6: 19±2 (1.9±0.2, 13.7±1.4)*

*T7: 23±3 (2.3±0.3, 16.6±2.2)*

*T8: 25±2 (2.5±0.2, 18.1±1.4)*

*T9: 34±2 (3.5±0.2, 25.3±1.4)*

---